

Comfort-05 Plus

COMFORT-05 PLUS ANATOMIC & ERGONOMIC OFFICE CHAIR



High back chair with adjustable headrest

Seat made from mold memory foam

Adjustable arms in 4 directions with soft polyurethane pad

Synchronized tilting mechanism in vertical position locking

Tilting tension control

Lumbar support made from elastic polypropylene with height adjustable

Class 4 gas lift from Samhongsa Company

Aluminum base up to 1136 Kg loaded


Casters with polyurethane surface Φ 60 mm


3 YEARS WARRANTY BIFMA - SGS

ΛΕΙΤΟΥΡΓΙΕΣ



PRODUCT DIMENSIONS

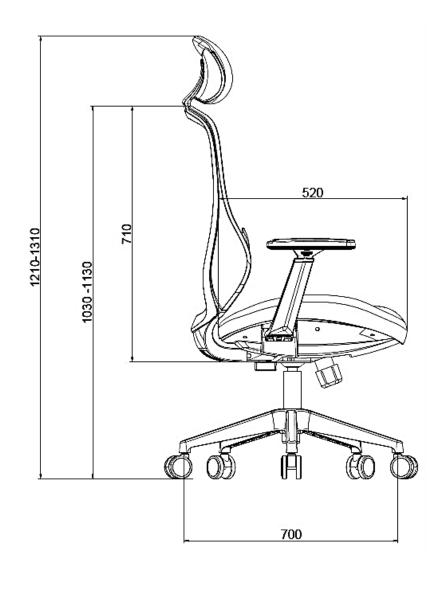

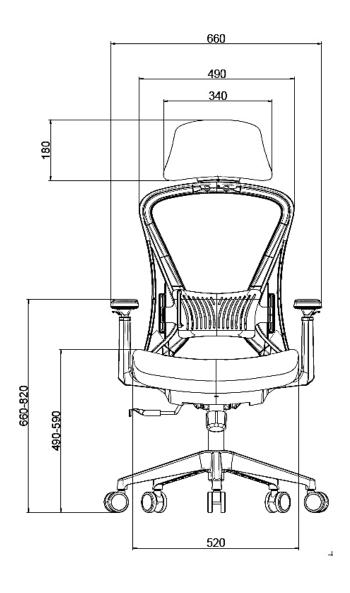

BIFMA ACCORDING COMPONENTS



Class 4 gas lift from Samhongsa company
Black piston has surface hardening to became extremely strong
Tube thickness 2.5 mm



Casters with polyurethane surface Φ 60 χιλ.



700 mm aluminum base



Seat made from mold memory foam

ΠΙΣΤΟΠΟΙΗΤΙΚΑ ΒΙΓΜΑ



Test Report

No.: GZHL1609042270FT

Date: Oct 27, 2016

The following sample(s) was/were submitted and identified on behalf of the client as:

Sample Description

: OFFICE CHAIR

SGS Ref No.

SDHL1609018445FT

Style / Item No.

Sep 28, 2016

Sample Receiving Date Sample Resubmission Date

Oct 20, 2016

Test Performing Date

: Sep 28, 2016 to Oct 26, 2016

Test(s) Requested	Result(s)	
Partial tests of ANSI/BIFMA X5.1:2011 (Type I, III)	PASS	
Summary:		
 For further details, please refer to the following page(s). 		

Signed for and on behalf of Guangzhou Branch SGS-CSTC Ltd.

Arthur Mak Approved Signatory



◆展·广州·福西州北京全区和中國和西南·100年 MM 210003 1 00-20-071000 1 00-20-007101 4 spi-designplant Member of the 1911 Group 1911 64:

Test Report

No.: GZHL1609042270FT

Date: Oct 27, 2016

TESTS AND RESULTS

Test Conducted; Partial tests of ANSI/BIFMA X5.1:2011 General-Purpose Office Chairs – Tests.

No. of Sample: 1 piece (Sample 1). For more sample information and pictures, please refer to the following page.

Chair Type: Type I, III.

Test and Requirements	Test Results
Safety, Durability and Structural Adequacy	
5 Backrest Strength Test - Static - Type I	
5.4.1 Functional Load There shall be no loss of serviceability to the chair when 890 N (200 lbf.) is applied to the backrest at the specified position for one (1) minute. With the backrest at its back stop position, apply a force that is initially 90 degrees ± 10 degrees to the plane of the backrest. The force is not intended to be maintained at 90 degrees ± 10 degrees. British the backrest.	PASS
5.4.2 Proof Load There shall be no sudden and major change in the structural integrity of the chair, loss of serviceability is acceptable, when 1334 N (300 lbl.) is applied to the backrest at the specified position for one (1) minute. With the backrest at its back stop position, apply a force that is initially 90 degrees ± 10 degrees to the plane of the backrest. The force is not intended to be maintained at 90 degrees ± 10 degrees throughout the loading of the backrest.	PASS
8 Drop Test - Dynamic	
8.4.1 Functional Load Test There shall be no loss of serviceability when a test bag weighing 102 kg (225 lb.) is tree fell from 52 mm (6 in.) above the uncompressed seat to the specified position on seat. Remove the bag, and set height to its lowest position and repeat the test for chairs with seat height adjustment features.	PASS
8.4.2 Proof Load Test There shall be no sudden and major change in the structural integrity of the chair. Loss of senriceability is acceptable when a test bag weighing 136 kg (300 lb.) is free fell from 152 mm (6 in.) above the uncompressed seat to the specified position on seat. Remove the bag, and set height to its lowest position and repeat the test for chairs with seat height adjustment features.	PASS



◆第一个第一位的技术的复数形型解释的数据100号 新聞 \$10000 1 (M-20 EVIDE 1 (M-20 EVIDE 1) 1 (M-20 EVIDE 1

Member of the SGS Group (SGS SA)



Test Report

No.: GZHL1609042270FT

Date: Oct 27, 2016

Test and Requirements	Test Results
12.3.2 Rear Stability Test for Type I and II Chairs Place a support finiture made of a 1.5 mm ± 0.4 mm (0.060 in. ± 0.015 in.) thick polypropylene, 356 mm (14 in.) wide and 711 mm (28 in.) tall against the chair back so that it approximates the contour of the back. Load the chair with 13 disks. Place the first disk on the seat so it touches the support finiture. As each disk is added to the stack slide it along the lower disk until it contacts the support fixture. If the chair does not tip over and the tit mechanism does not tit to its most rearward position (i.e., at its tilt stop) when the disks are placed in the chair, the chair shall also be tested according to 12.3.1 with the chair in the unlocked position. The chair shall not tip over.	PASS
12.4 Front Stability Tast Procedure - Atternative A (This alternative may only be used on chairs that do not have a seat surface that will support the stability loading fixture (i.e., mesh, web or strap seat support surfaces)) Apply a vertical load of 600 N (135 lbf.), through a 200 mm (7.87 in.) diameter disk, the center of which is 60 mm (2.4 in.) from the front center edge of the load-bearing surface of the seat. Apply a horizontal force of 20 N (4.5 lbf.) at the same level of the plane of the top of the seat. The force shall be coincident with the side-to-side centerline of the seat. Tast Procedure - Atternative B Apply a vertical load of 600 N (135 lbf.), by means of the front stability loading fixture at a point 60 mm (2.4 in.) from the firend center edge of the load-bearing surface of the chair. Apply a horizontal force of 20 N (4.5 lbf.) at the same level of the plane of the top of the seat. The force shall be coincident with the side-to-side centerline of the seat. The chair shall not to over as the result of the force application.	PASS



中語・广州・祖彦様太子皇区共中城市政府1994 MINE STORES 1 SN-20-SESSEE 1 SN-20-SESSEE + sp-dendpap-com

Water of the SOS Group SOS SA